

24

40

40

35

35

30

30

25

25

6

20

20

15

18

10

10


5

5


0


0

0

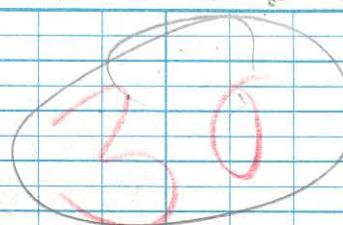

13
40
30.0 off
60

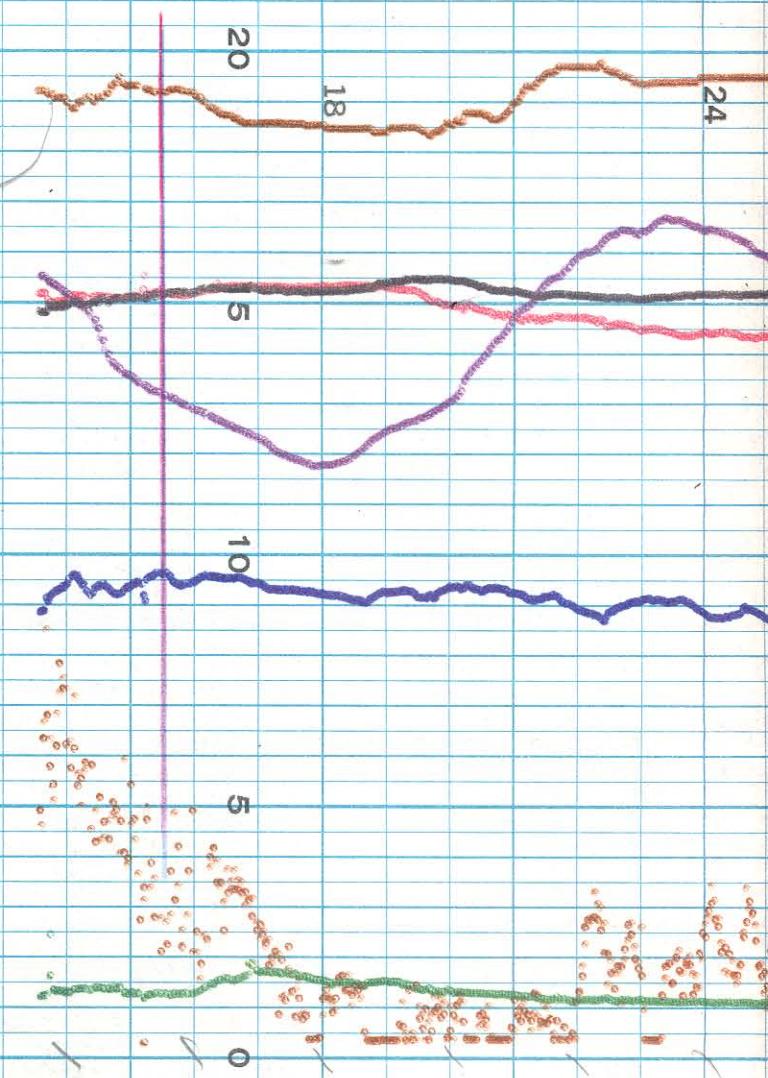

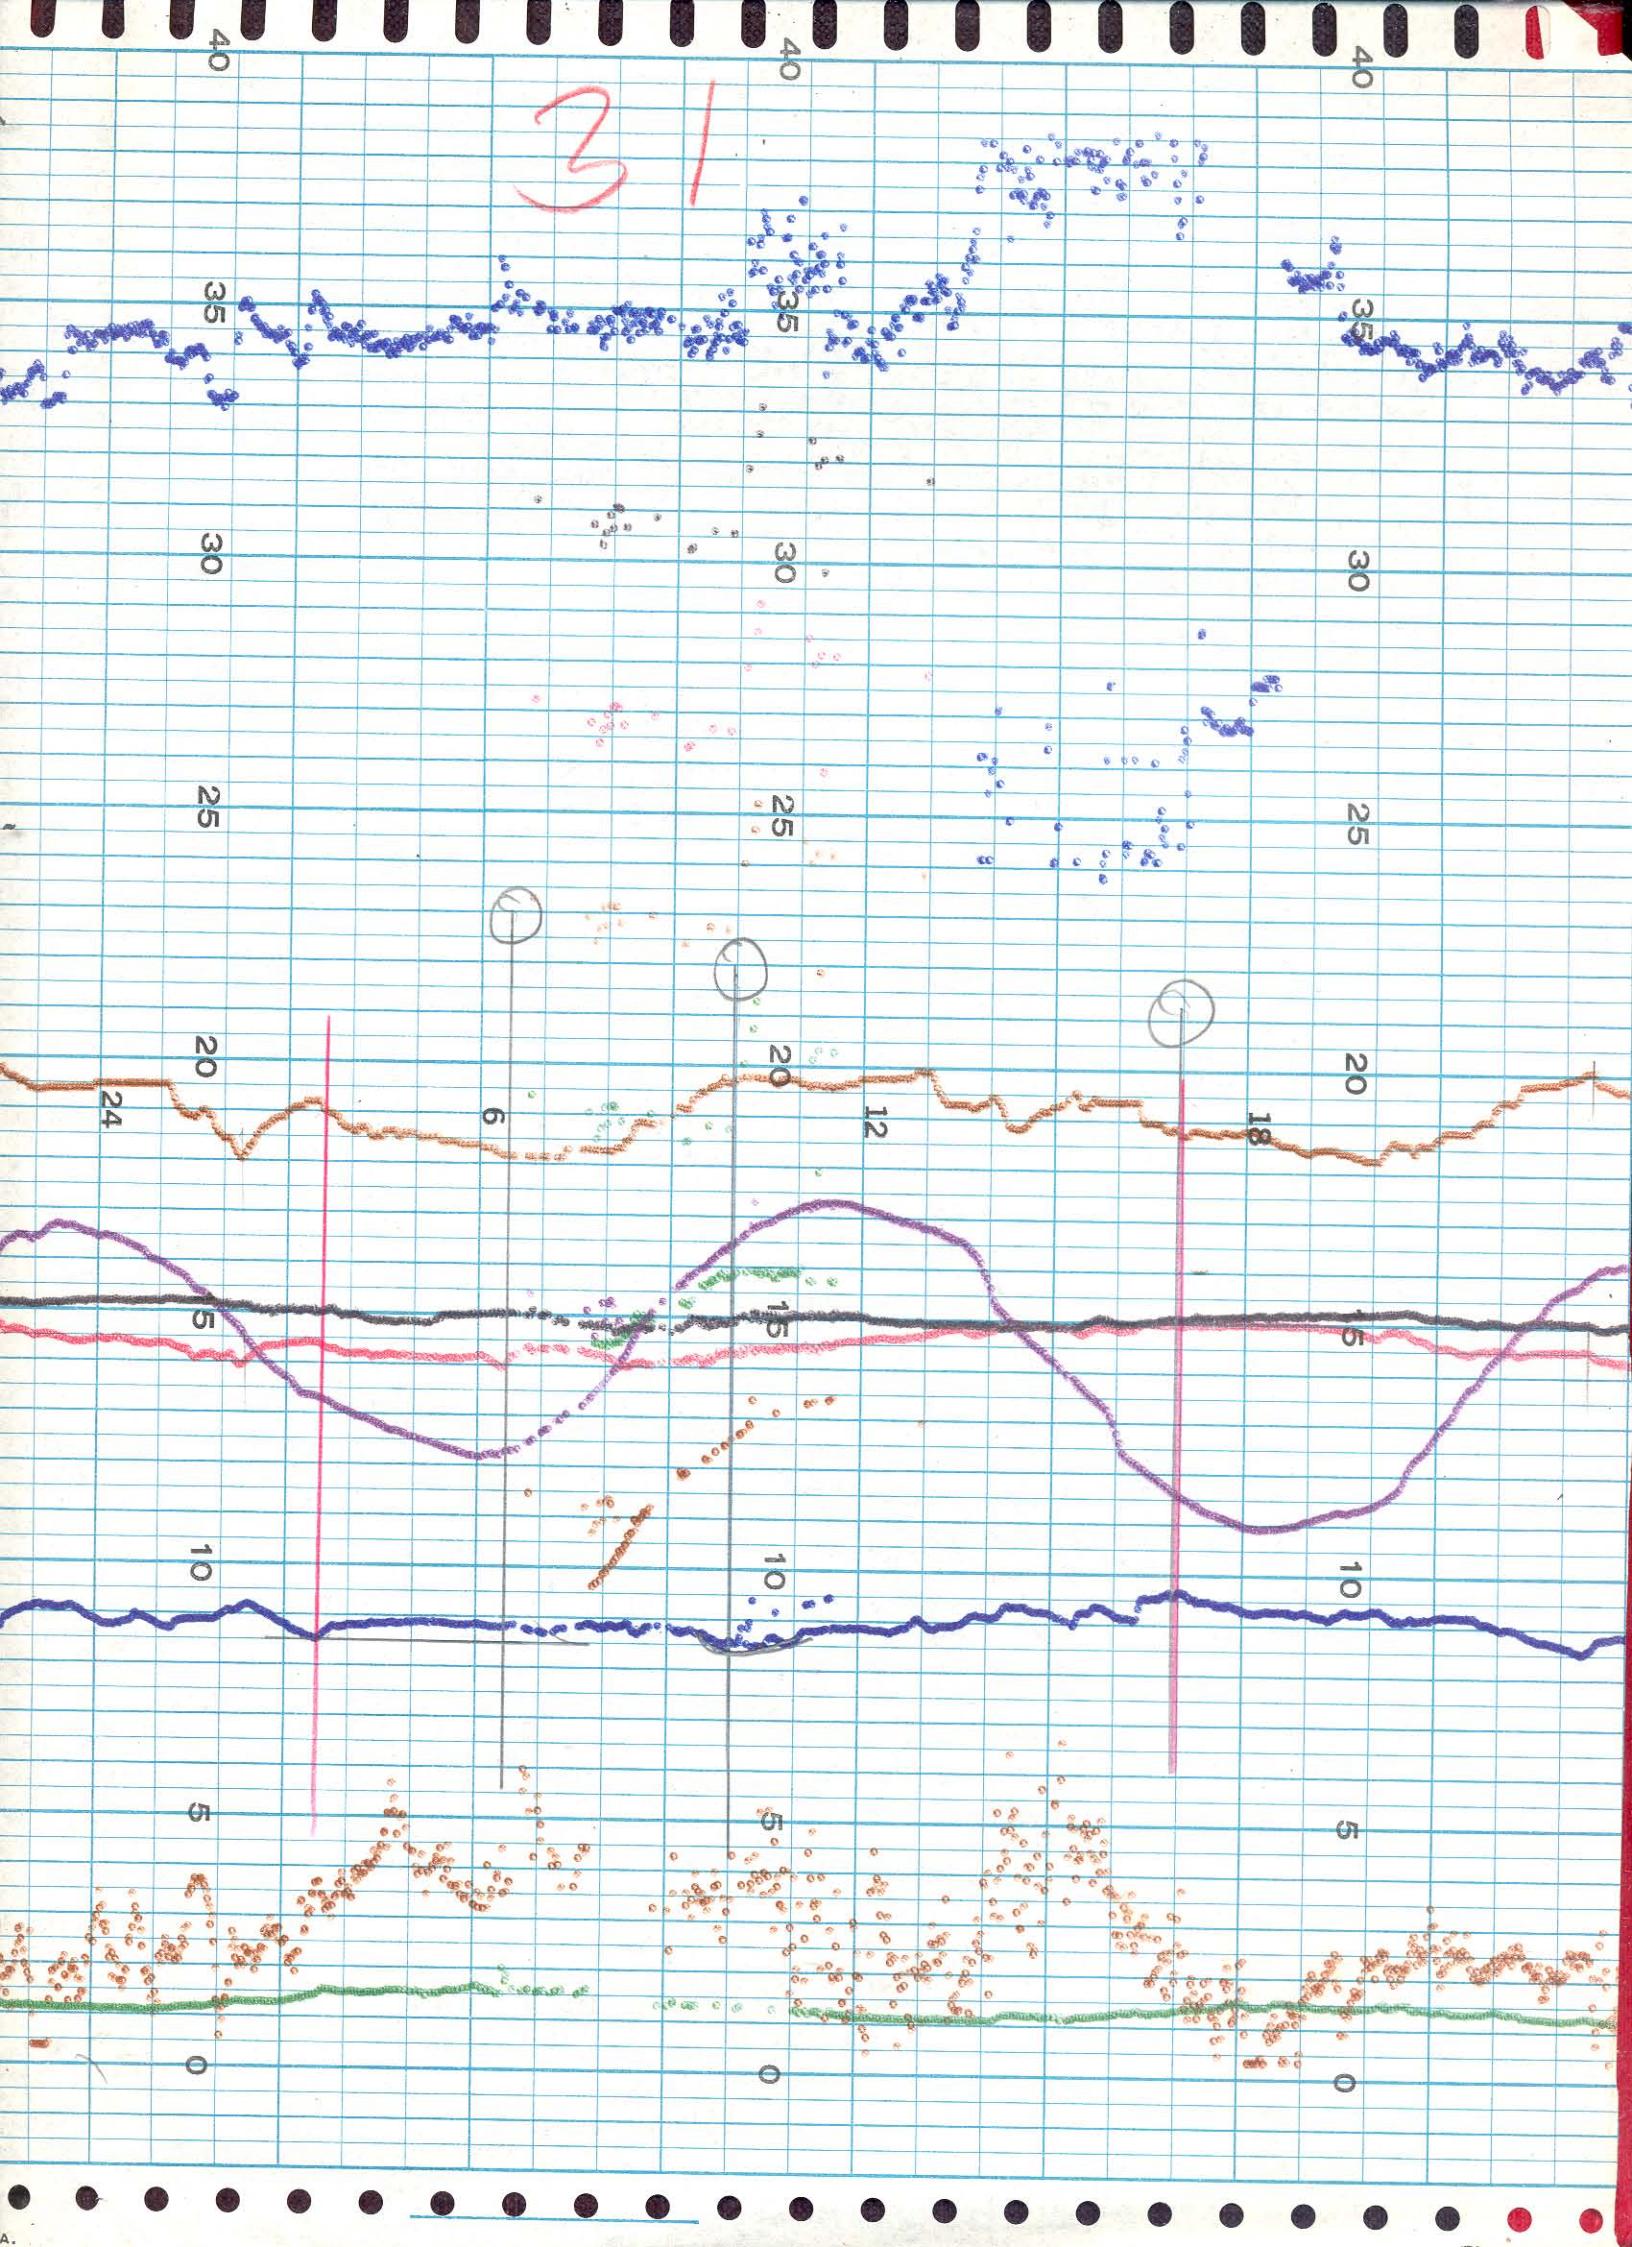

Month	Day	Time	Tide				
		Local	Honeywell	- .4	+ .9	+ .5	- .3
Oct	6	8	13	21	30	30	2
	9:40	0930	1200	0845	1310	1310	1450
Bot Air Temp. °C	16.8	15.9	14.6	14.7°	14.7	19.6	
Yellow Spring Water Temp. °C	16.4	15.7	14.7	14.6°	14.9	-	
Honeywell	15.6	15.5	15.1	14.0	15.1	19.2	
Surf Water Temp. °C	16.4	15.8	14.9	14.2	15.2	19.2	
Conductivity	17.9	15.3	16.6	16.3	17.3	fast C 19.8	18.0
Micromhos Honeywell	17.5	15.0	16.0	(5.3)	16.3	19.6	18.0
Serfass							
Water Samp. Bottle No.		#					
Dissolved O ₂	Honeywell	7.6	4.83	10.2	7.6	8.9	7.2
Dissolved O ₂	Winkler	7.5	8.1	7.6	7.9	7.0	7.5
Turbidity	JCU	21	11	13	23	11	12
Honeywell	Turbidity	10.7	10	10	10	10	10

13.5° Waverunner

Remarks
Note: Cond. reading 400 high No change after cleaning pulleys needed oil. may explain differences in cal. check. reset tide - .3
Note: Serfass reading 1600 low a year in test. value)
in piping (Bot Sd 18.4 temp 14.0 Bot set. Surf 11.7 14.8 16 = 26.4 - 7.6 Honeywell = 7.9 16 = 25.4 7.3 16 = 26.6 - 7.65 Honeywell = 7.8 24 = 26.4 - 7.6 16 = 31.1
Note: D.S. going up fast at time of C = 1. drop ok